

0408 Neon Strip Data sheet

Side Bend



- Using silicone extrusion process, 04*08Mini size design
- Uniform light emission, good appearance consistency
- Anti-yellowing, high temperature resistance, corrosion resistance, weak acid and alkali resistance
- Good flexibility, small size, light weight, easy installation
- Food-grade environmentally friendly silicone material.
- Waterproof grade IP67
- 3 years warranty


Technologies

- ON/OFF

Color Options




Beam Angle




Application

- This product is suitable for hotels, KTVs, homes, cabinets, courtyards, etc., for contouring, atmosphere lighting, decorative lighting and other purposes.


Dimensions

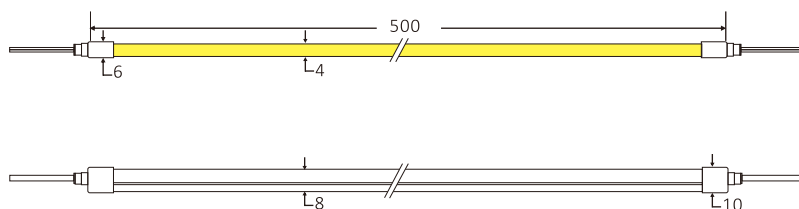


Sectional drawing



Recommended Accessories



Side exit
end cap



Bottom Exit
end cap



Direct Exit
End cap



End cap



Bendable Profile



Clip



cable

Optical parameters

P/N	LED Quantity	CCT K	CRI	LED (SM)	LUMENS (lm/m)	Vf. (V.)	Current (mA/M)	Power (W/M)	Cut Length (MM)	Max Run (M)
RL-FV2404180221906-XXX-FWS0408	2219	2700	80/90	180	120	24	250	6	33.3	5
		3000			120					
		4000			130					
RL-FV2404168283506-XXX-FWS0408	2835	2700	80/90	168	130	24V	250	6	35.7	5
		3000			130					
		4000			140					

Other Specifications

Protection grade	IP67
Working temperature (°C)	-25~+60
Standard length (°C)	-25~+70
Maximum cascade length(m)	5
Maximum cascade length (m)	5
weight	/

Remark

- The test environment temperature is 25±2°C;
- The above data are typical values, the actual parameters of the product may be different from the typical data; the data is subject to change without notice;
- The above "/" means that this parameter is not required for the time being.


Applied Standards




Installation

Note :Due to the different types and attributes of neon lights, please refer to the, line marks forthe bending radius

① Bending Direction & Min. radius




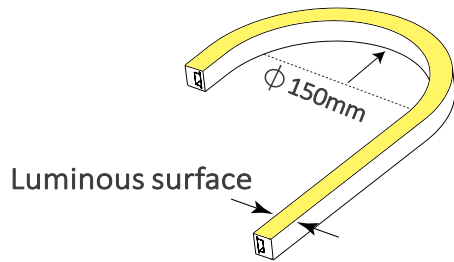


② Top bending prohibited




Mounting with aluminium profiles

Install with the screws provided. Do not use screws of othertypes or sizes that do not meet requirements.

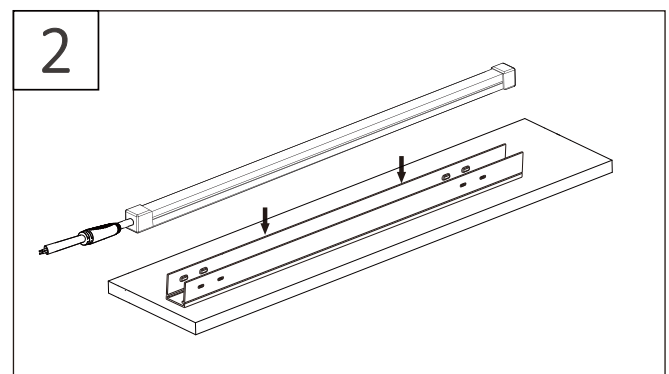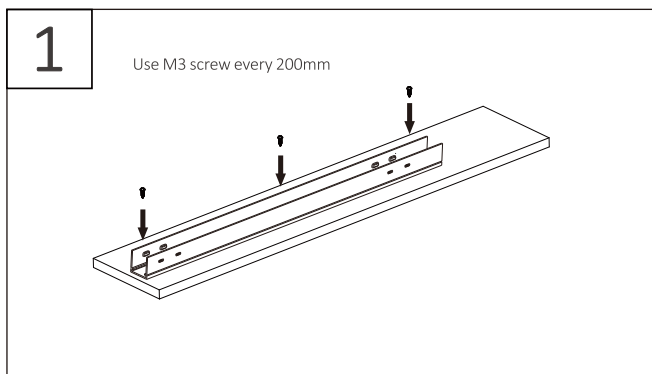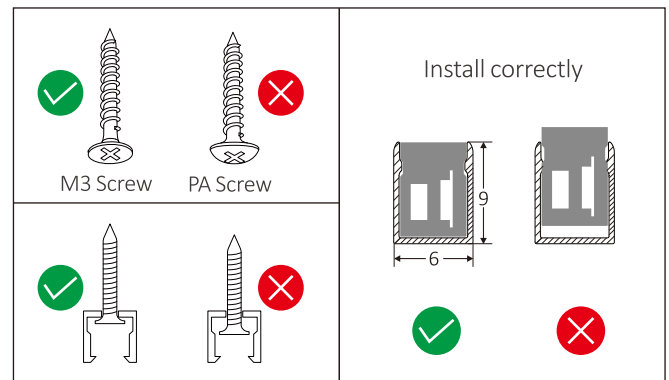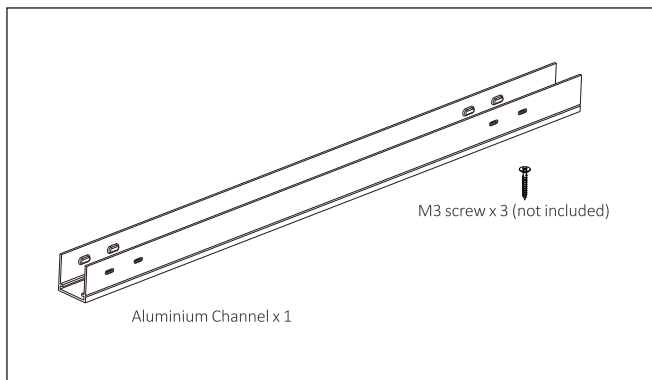


Schematic diagram of electrical connection

Monochrome temperature wiring diagram : Power + lamp belt connection mode

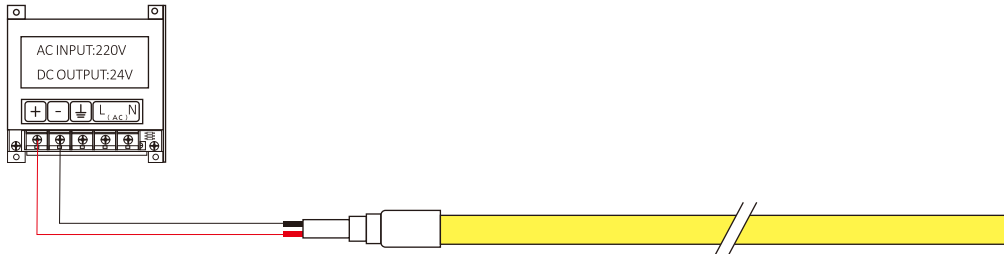

Package

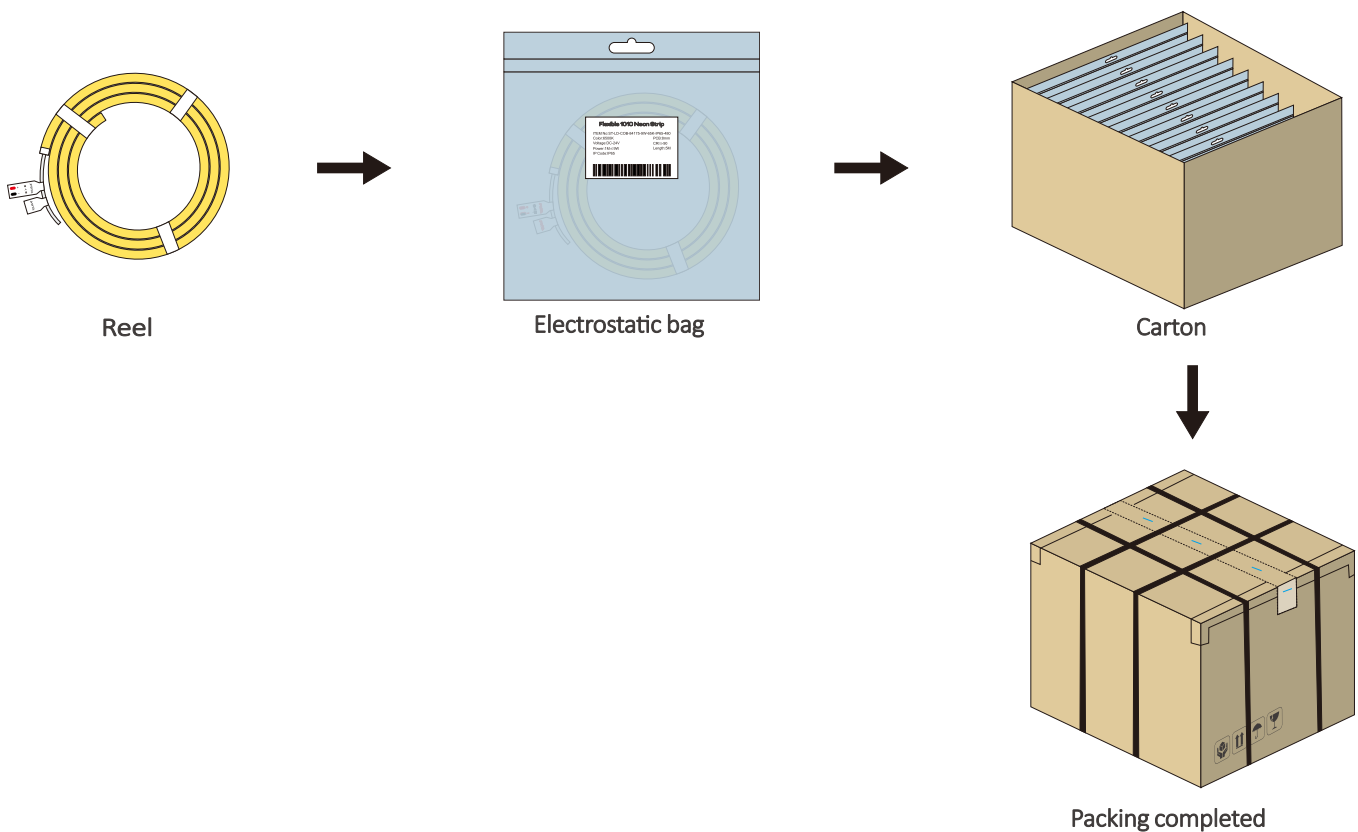

Note : The above-mentioned packaging quantity and weight are only for the packaging method shown in the figure. There will be differences in the number and weight of packaging for other packaging methods, and the actual product shall prevail.



Specialized
LED Strip Manufacturer

Shenzhen
Relight Technology Co.,Ltd

6th Floor, Building A, Guancheng Industrial Park, Gongming Town,
Guangming District, Shenzhen, China

Tel: 86 0755 3369 1713
Web: www.relight-tech.com
E-mail: Sales@relight-tech.com