

1010 40x65° angle neon strip Data Sheet

Top Bend



- 10x10mm neon with built-in 40x65° beam angle. Both the LED and neon tube incorporate optical design
- Superior wall-washing performance – High coverage with uniform light distribution, no color deviation, and smooth, soft illumination.
- Single-end power supply – Supports connections up to 5 meters in length.
- Seamless silicone construction – Crafted with integrated extrusion molding technology using food-grade silicone material.
- Waterproof grade IP67 • 5 years warranty


Technologies

ON/OFF


Applications

- This product is suitable for use in home decoration, hotels, shopping malls, clothing stores, advertising signs, oil painting decoration, decorative lighting, etc.


Color Options




Dimensions

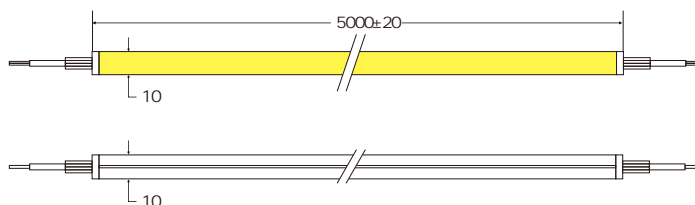

Beam Angle

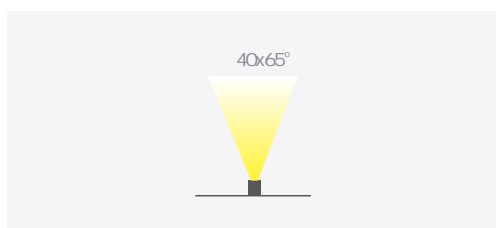


Sectional drawing



Recommended Accessories



Side exit
end cap



Bottom Exit
end cap



Direct Exit
End cap




End cap



Bendable Profile



Clip



cable

Product Specifications

P/N	LED Quantity	OCT/K	CRI	LEDs/m	LUMENS (lm/m)	Vf/V	Current (mA/M)	Power (W/M)	Cut Length (MM)	Max Run (M)
RL-FV2408120283506-XXX-FWD1010	2835	2700	80/90	120	360	24	250	6	50	5
		3000			360					
		4000			390					
		6500			390					

Other Specifications

Protection grade	IP67
Working temperature(°c)	-25~+60
Storage environment temperature (°c)	-25~+70
Standard length	5
Maximum cascade length(m)	5
weight	/

Remark

- The test environment temperature is 25±2°C;
- The above data are typical values, the actual parameters of the product may be different from the typical data; the data is subject to change without notice;
- The above "/" means that this parameter is not required for the time being.


Applied Standards




Installation

Note: Due to the different types and attributes of neon lights, please refer to the line marks for the bending radius

① Bending Direction & Min. radius




② Side bending prohibited



Mounting with aluminium profiles

Install with the screws provided. Do not use screws of other types or sizes that do not meet requirements.



RL-1010-01

Description

W
(mm)

H
(mm)


Item Code

RL-1010-01


124

121

/

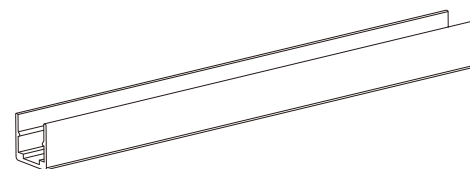


Aluminium Channel




Aluminium Channel x 3


1

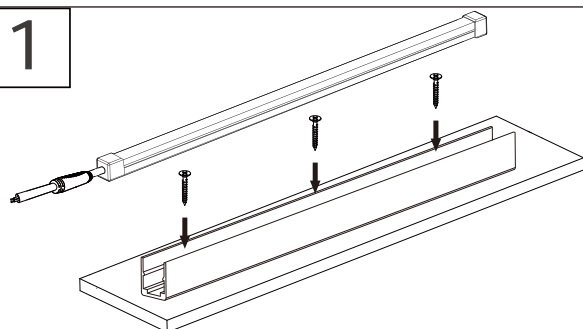


2

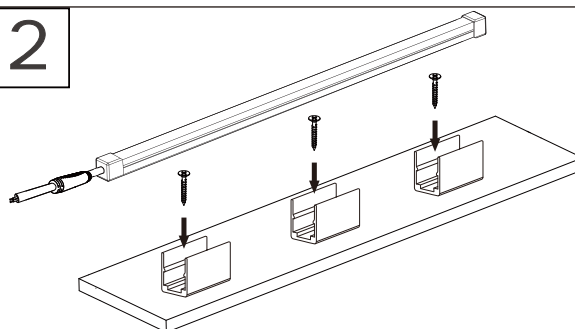

Package

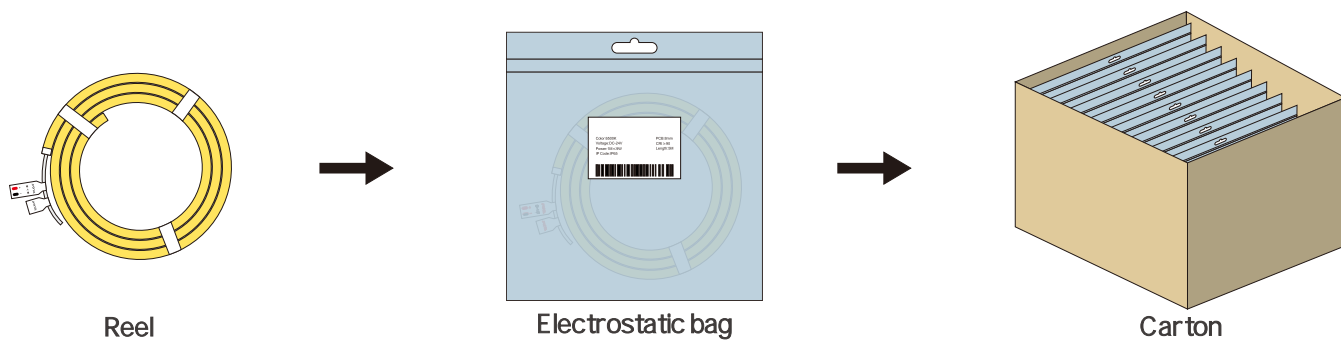


Quan ty per roll (m)	Quan ty per case (m)	Total weight (Kg)	Outer box dimensions (mm)		
			Length	Width	Height
5	100	20	480	370	430


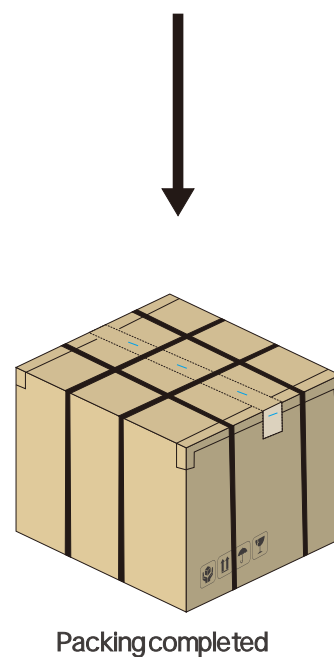


Note : The above-mentioned packaging quantity and weight are only for the packaging method shown in the figure. There will be differences in the number and weight of packaging for other packaging methods, and the actual product shall prevail.


Installation Guidelines for LED Light Strips

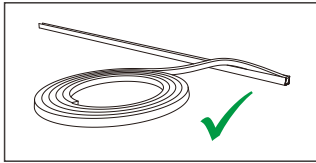


1. During LED strip installation, ensure to unroll the strip loop by loop and maintain perpendicular alignment with the mounting profile. Avoid twisting or kinking of the strip at all times.

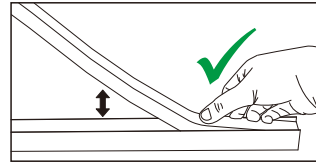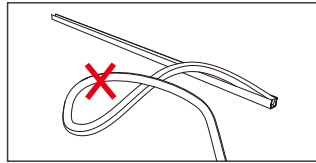

2. Align the LED strip with the opening of the profile, gently bend and press the strip into the profile, and strictly avoid excessive bending or kinking of the strip.




The safe tensile force for the LED strip shall be 40N. Excessive force may damage the internal circuitry.




The safe twisting angle for the LED strip shall not exceed 180°.


Warning sign




Allowable Marking Area
(on the top or side of the product)




Neat and smooth cut




Mount the roll on a rod over the box and rotate to use




Top Bend




Side Bend




Free Bend




Do not leave uneven cuts




Do not twist during use




Repeated bending may damage electronic circuits



Do not puncture or scratch with sharp objects



Do not bend at sharp angles



Do not jerk or yank when using the product

1. The cutting marks are located on the PCB. Refer to the product cutting line window or laser markings on the surface to identify the trimming position.

2. During transportation and application, please observe the above warning labels. Proper handling ensures optimal performance and user satisfaction.

Common product faults and their troubleshooting methods

Fault Phenomena	Possible Causes	Troubleshooting Methods
All lights o	1. Mains power failure	Power on
	2. Open circuit or short circuit at switching power supply output triggering auto-protection	Troubleshoot and restore power
	3. Reverse polarity at LED strip power input	Check wire connection status to ensure correct polarity
Paral lights o	1. Parallel switching power supply failure	Inspect power supply system and resolve faults
	2. Wiring error in parallel LED strip circuits	
	3. Reverse polarity in parallel LED strips	Correct wiring
LED uneven brightness or insufficient brightness	1. Power supply overload	Replace with higher-power supply according to load
	2. Excessive line loss in switching power circuits or significant line loss discrepancies	Maintain LED strip operating voltage within $\pm 5\%$ of rated voltage 1. Shorten power cable length between power supply and LED strip or use larger gauge wires 2. Ensure number of LED strips per circuit (max allowed cascading quantity and keep cascading quantity similar per circuit).
	3. Excessive serial connection of LED strips	Adjust LED strip quantity per power branch to meet max allowed cascading requirements per circuit
LED flickering	1. Poor contact at connection points	Identify and resolve poor contact points
	2. Switching power supply malfunction	Replace switching power supply



- If the external flexible cable of this product is damaged, the cable must be replaced by the manufacturer or similarly qualified personnel to prevent hazards.
- For specific installation arrangements and precautions, refer to the product user manual.
- Data in this specification is based on standard products. Actual delivered products may vary, subject to physical measurements.
- All product diagrams in this specification are schematic diagrams. Actual delivered products may differ, subject to physical objects.
- Technical modifications may be implemented without prior notice.
- Shenzhen Meishang Lighting Co., Ltd. reserves the final interpretation rights of this manual.



Specialized
LED Strip Manufacturer

Shenzhen
Relight Technology Co.,Ltd

6th Floor, Building A, Guancheng Industrial Park, Gongming Town,
Guangming District, Shenzhen, China

Tel: 86 0755 3369 1713
Web: www.relight-tech.com
E-mail: Sales@relight-tech.com