

2513 Top Bend Neon Strip Data Sheet

Top Bend



- Wire-free pseudo-silicone belt light new ID design, product simple aesthetics, premium texture
- Complete accessories, supports U-shaped combination installation, wide application range, strong design sense
- Food-grade silicone material extrusion molding process design, safe and reliable
- Anti-yellowing, high-temperature & corrosion resistance, simple installation
- Waterproof grade IP67 • 5 years warranty

Technologies

- ON/OFF


Application

- This product is suitable for engineering projects, hotels, shopping malls, residential lighting and other applications, supports DIY light arrangement, meets various lighting needs


Color Options




Dimensions

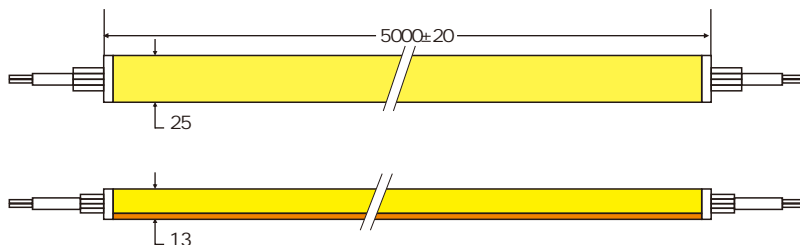


Beam Angle

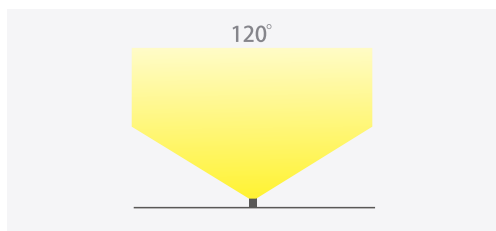


Sectional drawing



Recommended Accessories



Side exit
end cap



Bottom Exit
end cap



Direct Exit
End cap




End cap



Bendable Profile



Clip



cable

Product Specifications

P/N	LED Quantity	CCT K	CRI	LEDs/m	LUMENS (lm/m)	Vf. (V)	Current (mA/M)	Power (W/M)	Out Length (MM)	Max Run (M)
RL-FV2412360283514-XXX-TCE2513	2835	2700	80/90	24	1500	24	336	14	33.33	5
		3000			1500					
		4000			1500					
		6500			1500					

Other Specifications

Protection grade	IP67
Working temperature(°c)	-25~+60
Storage environment temperature (°c)	-25~+70
Standard length	5
Maximum cascade length(m)	5
weight	/

Remark


- The test environment temperature is 25±2°C;
- The above data are typical values, the actual parameters of the product may be different from the typical data; the data is subject to change without notice;
- The above "/" means that this parameter is not required for the time being.

Applied Standards




Installation

Note: Due to the different types and attributes of neon lights, please refer to the line marks for the bending radius.


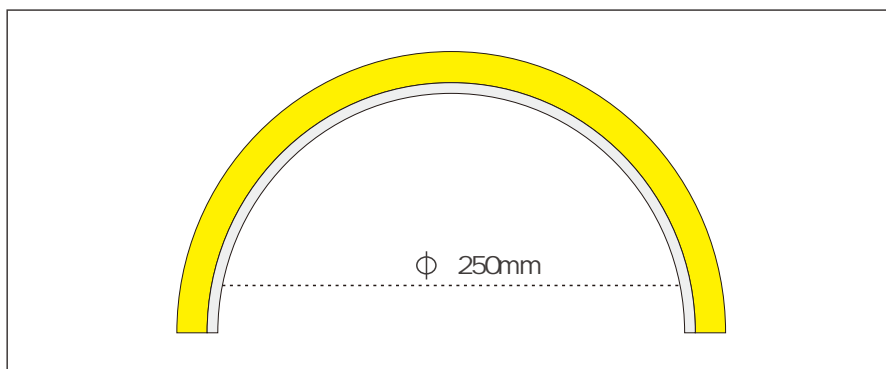


Mounting with aluminium profiles

Install with the screws provided. Do not use screws of other types or sizes that do not meet requirements.

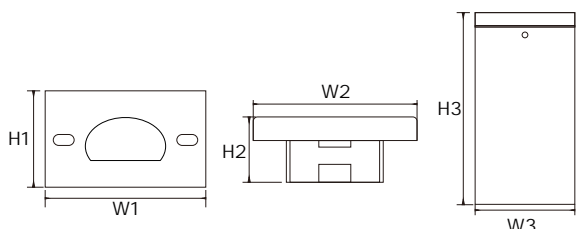


Description	W1 (mm)	H1 (mm)	W2 (mm)	H2 (mm)	W3 (mm)	H3 (mm)
RL-101001	124	124	124	124	124	124

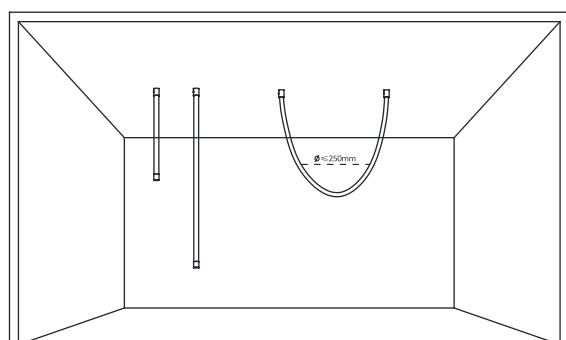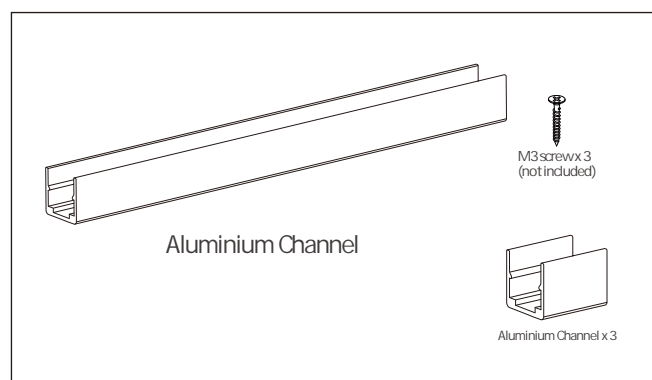


Snap-on installation method

Schematic diagram of electrical connection

1. Monochrome temperature wiring diagram 1: Power + lamp belt connection mode

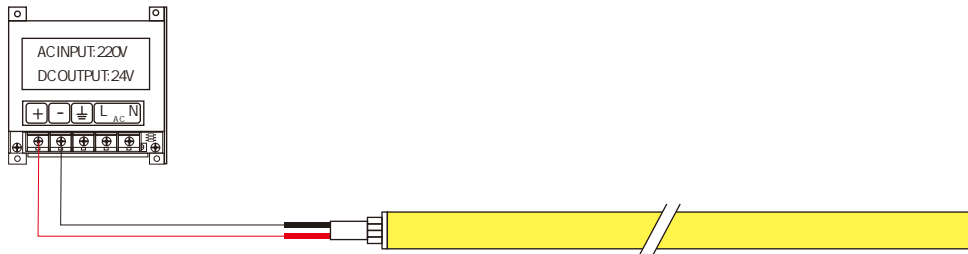


Package


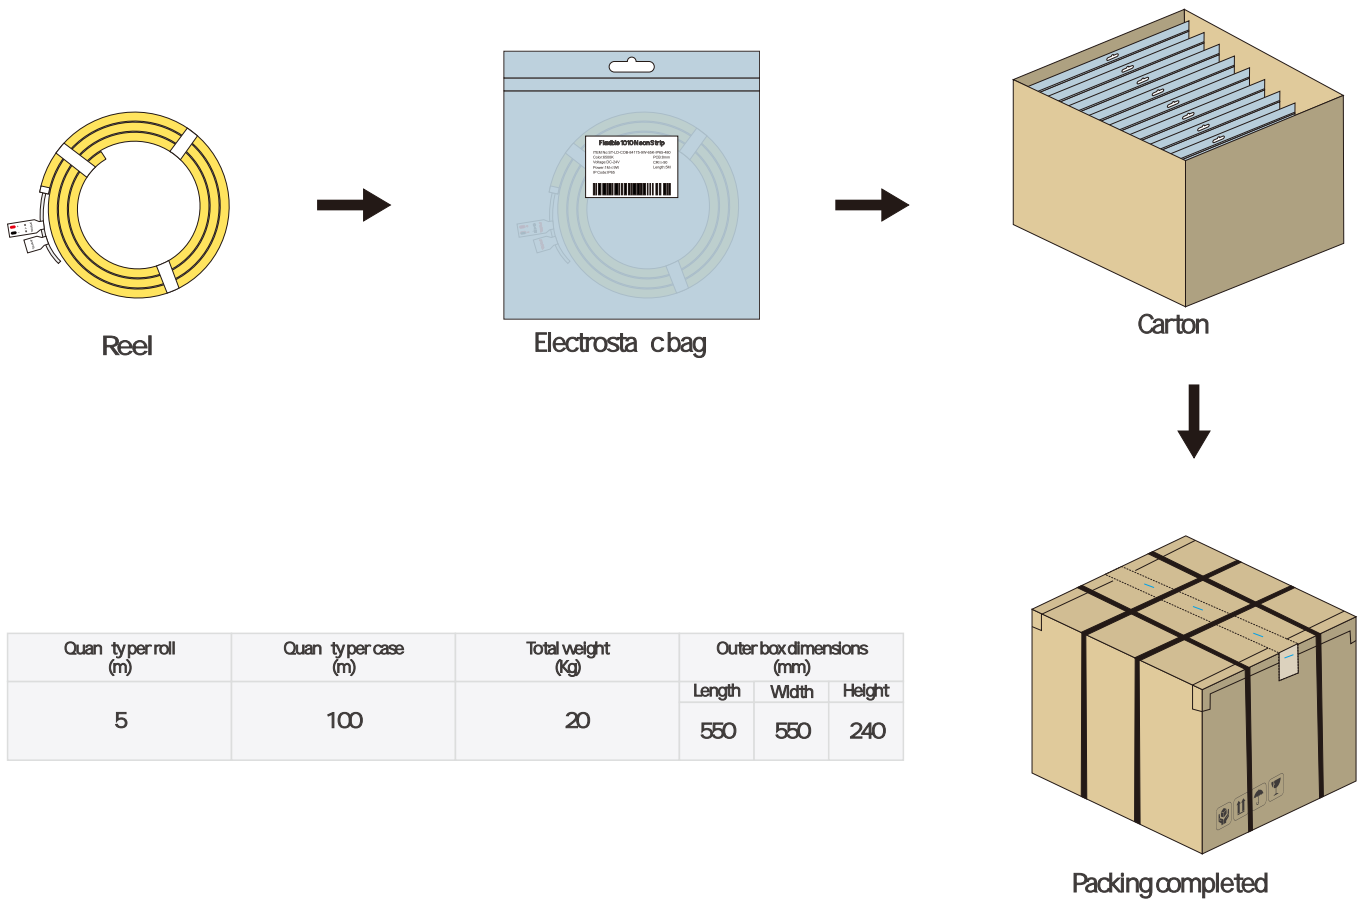


Note : The above-mentioned packaging quantity and weight are only for the packaging method shown in the figure. There will be differences in the number and weight of packaging for other packaging methods, and the actual product shall prevail.


Installation Guidelines for LED Light Strips




1. During LED strip installation, ensure to unroll the strip loop by loop and maintain perpendicular alignment with the mounting profile. Avoid twisting or kinking of the strip at all times.



2. Align the LED strip with the opening of the profile, gently insert and press the strip into the profile, and strictly avoid excessive bending or kinking of the strip.




The safe tensile force for the LED strip shall be 40N. Excessive force may damage the internal circuitry.




The safe twisting angle for the LED strip shall not exceed 180°.


Warning sign




Cuttable Marking Area
(on the top or side of the product)




Neat and smooth cut




Mount the roll on a rod over the box and rotate to use




Top Bend




Side Bend




Do not bend left or right




Do not leave uneven cuts




Do not twist during use




Repeated bending may damage electronic circuits



Do not puncture or scratch with sharp objects



Do not bend at sharp angles



Do not jerk or yank when using the product

1. The cutting marks are located on the PCB. Refer to the product cutting line window or laser markings on the surface to identify the trimming position.

2. During transportation and application, please observe the above warning labels. Proper handling ensures optimal performance and user satisfaction.

Common product faults and their troubleshooting methods

Fault Phenomena	Possible Causes	Troubleshooting Methods
All lights o	1. Mains power failure	Power on
	2. Open circuit or short circuit at switching power supply output triggering auto-protection	Troubleshoot and restore power
	3. Reverse polarity at LED strip power input	Check wire connection status to ensure correct polarity
Paral lights o	1. Parallel switching power supply failure	Inspect power supply system and resolve faults
	2. Wiring error in parallel LED strip circuits	
	3. Reverse polarity in parallel LED strips	Correct wiring
LED uneven brightness or insufficient brightness	1. Power supply overload	Replace with higher-power supply according to load
	2. Excessive line loss in switching power circuits or significant line loss discrepancies	Maintain LED strip operating voltage within $\pm 5\%$ of rated voltage 1. Shorten power cable length between power supply and LED strip or use larger gauge wires 2. Ensure number of LED strips per circuit (max allowed cascading quantity and keep cascading quantity similar per circuit).
	3. Excessive serial connection of LED strips	Adjust LED strip quantity per power branch to meet max allowed cascading requirements per circuit
LED flickering	1. Poor contact at connection points	Identify and resolve poor contact points
	2. Switching power supply malfunction	Replace switching power supply



- If the external flexible cable of this product is damaged, the cable must be replaced by the manufacturer or similarly qualified personnel to prevent hazards.
- For specific installation arrangements and precautions, refer to the product user manual.
- Data in this specification is based on standard products. Actual delivered products may vary, subject to physical measurements.
- All product diagrams in this specification are schematic diagrams. Actual delivered products may differ, subject to physical objects.
- Technical modifications may be implemented without prior notice.
- Shenzhen Meishang Lighting Co., Ltd. reserves the final interpretation rights of this manual.



Specialized
LED Strip Manufacturer

Shenzhen
Relight Technology Co.,Ltd

6th Floor, Building A, Guancheng Industrial Park, Gongming Town,
Guangming District, Shenzhen, China

Tel: 86 0755 3369 1713
Web: www.relight-tech.com
E-mail: Sales@relight-tech.com