
# Single-Lamp Single-Cut High-Lumen Bare Strip Data Sheet



- Single lamp single cut bare strip, high luminous efficacy model 160lm/W special LED customization
- Uniform luminous, easy installation, reliable quality.
- ERP spectral classification, single BIN shipment, high cost-effectiveness
- Single-end power supply 5M
- Waterproof grade IP20
- 3 years warranty

### **Technologies**

• ON/OFF

### **Applicatio**

• This product is suitable for home decoration: engineering projects, large buildings, hotels, shopping malls, indirect lighting, recessed lighting, decorative lighting and other applications.

#### **Color Options**










### **Dimensions**

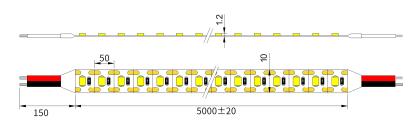

### Beam Angle





# **Product Specifcations**

P/N	LED Quantity	CCT	CRI	LED (SM)	LUMENS (lm/m)	Vf.	Current (mA/M)	Power (W/M)	Cut Length (MM)	Max Run (M)
RL-FV2410120283510-XXX	2700 3000 4000 6500	2700	80/90	120	1550	24	416	10	8.333	5
		3000			1550					
		4000			1600					
		6500			1600					

# Other Specifications

Protection grade	IP20	
Working temperature(°c)	-25~+60	
Storage environment temperature (°c)	-25~+70	
Standard length	5	
Maximum cascade length(m)	5	
weight	/	

#### Remark

- The test environment temperature is 25±2°C;
- The above data are typical values, the actual parameters of the product may be different from the typical data; the data is subject to change without notice;
- The above "/" means that this parameter is not required for the time being.

# **Applied Standards**


















www.relight-tech.com 2025 Relight TECHNOLOGIES.ALL RIGHTS RESERVED

# ZELIGHL

# Installation

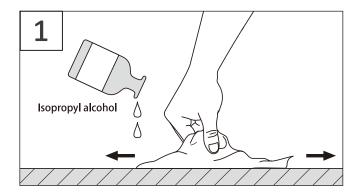








# Do's and Don'ts

### **Minimum Bending Radius**





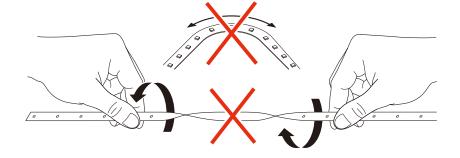


Note: During bending operations, please follow the standard operations in the above diagram. Excessively small bending angles or non-standard operations will cause adverse effects to the product's internals.

www.relight-tech.com 2025 Relight TECHNOLOGIES ALL RIGHTS RESERVED





# Schematic diagram of electrical connection

### Monochrome temperature wiring diagram 1: Power + lamp belt connection mode

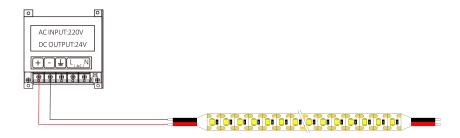

### Package

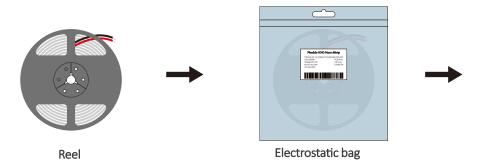





Quantity per roll (m)	Quantity per case (m)	Total weight (Kg)	Outer box dimensions (mm)		
			Length	Width	Height
5	200	≤20	550	550	240



Packing completed

Note :The above-mentioned packaging quantity and weight are only for the packaging method shown in the figure. There will be differences in the number and weight of packaging for other packaging methods, and the actual product shall prevail.

www.relight-tech.com 2025 Relight TECHNOLOGIES.ALL RIGHTS RESERVED



### Common product faults and their troubleshooting methods

Fault Phenomena	Possible Causes	Troubleshooting Methods		
All lights off	1.Mains power failure	Power on		
	2. Open circuit or short circuit at switching power supply output triggering auto-protection	Troubleshoot and restore power		
	3. Reverse polarity at LED strip power input	Check wire connection status to ensure correct polarity		
Partial lights off	1.Partial switching power supply failure	Inspect power supply system and resolve faults		
	2. Wiring error in partial LED strip circuits	inspect power supply system and resolve lauits		
	3. Reverse polarity in partial LED strips	Correct wiring		
LED uneven brightness or insufficient brightness	1. Power supply overload	Replace with higher-power supply according to load		
	Excessive line loss in switching power circuits or significant line loss discrepancies	Maintain LED strip operating voltage within ±5% of rated voltage  1. Shorten power cable length between power supply and LED strip or use larger gauge wires;  2. Ensure number of LED strips per circuit ≤ max allowed cascadin quantity and keep cascading quantities similar per circuit).		
	3. Excessive serial connection of LED strips	Adjust LED strip quantity per power branch to meet max allowed cascading requirements per circuit		
LED flickering	1.Poor contact at connection points	Identify and resolve poor contact points		
	2.Switching power supply malfunction	Replace switching power supply		



# **Notice**

- If the external flexible cable of this product is damaged, the cable must be replaced by the manufacturer or similarly qualified personnel to prevent hazards.
- For specific installation arrangements and precautions, refer to the product user manual.
- Data in this specification is based on standard products. Actual delivered products may vary, subject to physical measurements.
- All product diagrams in this specification are schematic diagrams. Actual delivered products may differ, subject to physical objects.
- Technical modifications may be implemented without prior notice.
- Shenzhen Meishang Lighting Co., Ltd. reserves the final interpretation rights of this manual.



# Shenzhen Relight Technology Co.,Ltd

6th Floor, Building A, Guancheng IndustrialPark,Gongming Town, Guangming District, Shenzhen, China

Tel: 86 0755 3369 1713 Web: www.relight-tech.com E-mail: Sales@relight-tech.com