


AC LED Light Engine Specification DOB D38 Series



- Connects directly to AC Power
- Various CCT available: 2700/3000/3500/4000/5000/5700/6500K
- CRI:90/80
- Macadam 3/5/7steps color bin
- Solutions for Down light / Spotlight/Candle light/Ceiling light
- AC line voltage 230V input directly
- Power factor higher than 0.9
- TRIAC dimmable

General Application



Down light



Ceiling light



Spot light

Applied standards



EN 62321


EMC: EN 55015 EN 61547 EN 61000-3-2 EN 61000-3-3



EMI: EN55015 EN61000-3-2 EN61000-3-3

LVD: EN62471 EN62031

Mechanical dimension (Unit: mm)

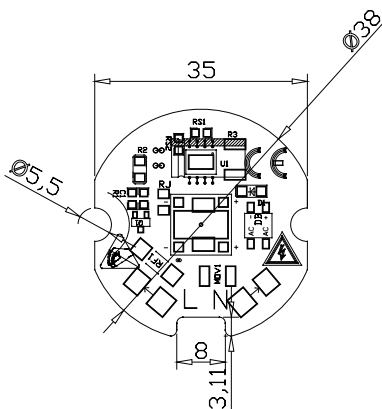


Absolute maximum rating at 25 °C

P/N	Size	Input	Power	PF	Flux	Efficiency	CCT	CRI	Dimming
	mm	Vac	W	-	Lm	Lm/W	K	-	-
RL-LMD38A1A1AH005-827FF	Ø38	230	15	0.9	500	100	2700	80	TRIAC
RL-LMD38A1A1AH005-830FF	Ø38	230	15	0.9	525	105	3000	80	TRIAC
RL-LMD38A1A1AH005-840FF	Ø38	230	15	0.9	550	110	4000	80	TRIAC
RL-LMD38A1A1AH005-850FF	Ø38	230	15	0.9	550	110	5000	80	TRIAC
RL-LMD38A1A1AH005-865FF	Ø38	230	15	0.9	550	110	6500	80	TRIAC


Optical-Electrical Characteristics at 25 °C

Feature	Parameter description	RL-D57 Series
Power Dissipation (max)		5
Luminous Flux (max)		600lm
Efficiency		100-120lm/W
Bead specification		DOB
Working Voltage		AC200-260V
Power Factor		> 0.9
Flicker	Pst: 0.037 SVM: 0.023	
Hi-pot		1.5KV
Surge level		2.5KV
Substrate material		Aluminum
Color temperature		2700-6500K
Color rendering index		> 80


Relative Spectral Distribution vs. Wavelength Characteristic

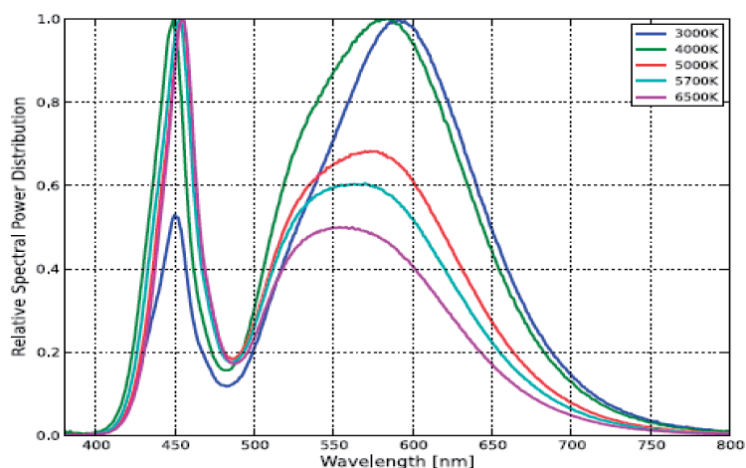


Relative Power Distribution vs. Voltage at Ta=25 °C

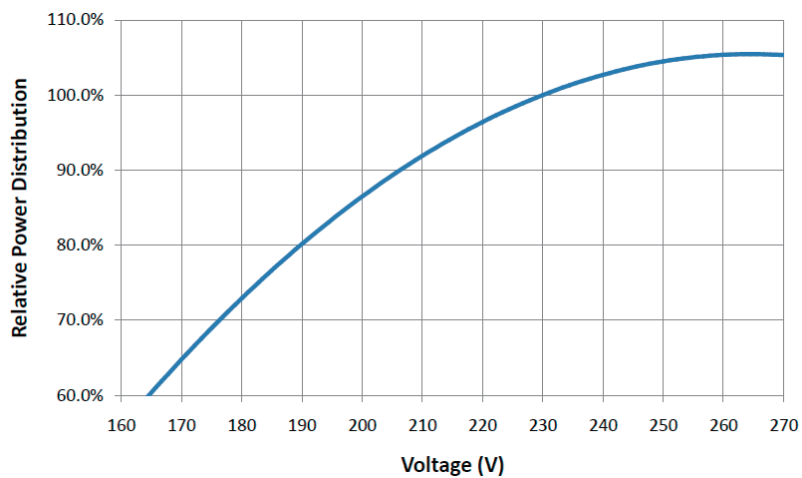


Relative Luminous flux vs. Voltage at Ta=25 °C

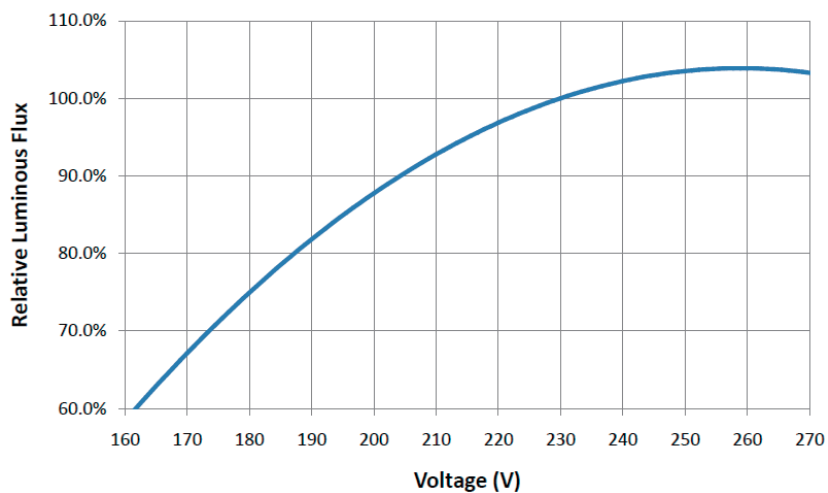


Chromaticity coordinates bin chart

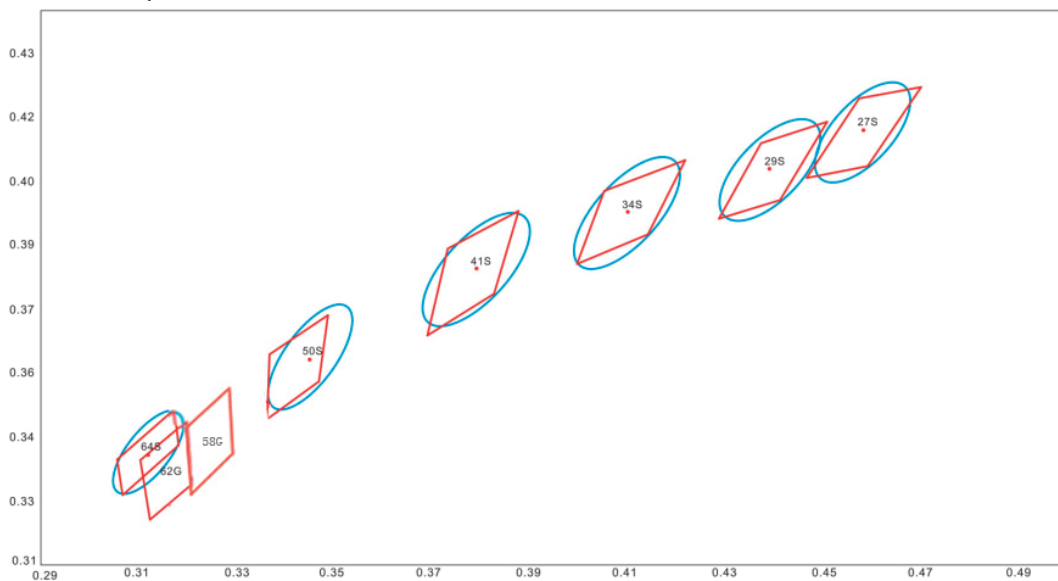


Package

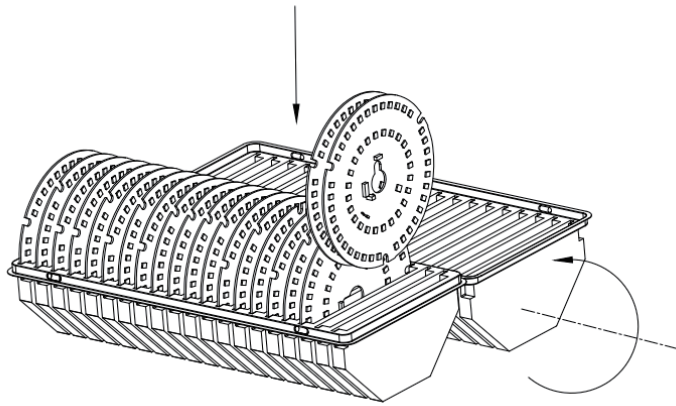

①

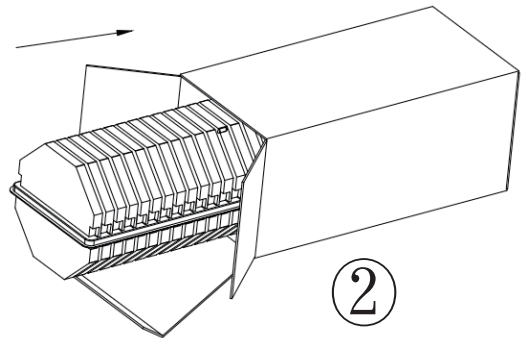

②

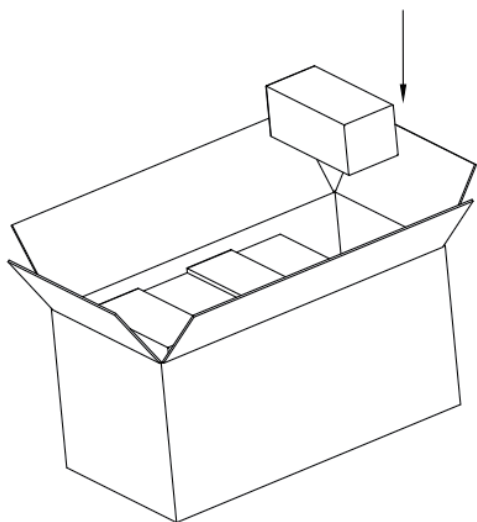

③



Safety Information

1. The LED module and all its components shall not be subjected to mechanical stress
2. Correct electrical polarity, otherwise module may be damaged
3. Ensure the power supply is suitable for the total load.
4. Electrostatic Discharge (ESD) precautions shall be incorporated when handling or installing the module.
5. Installation of LED modules shall refer to all applicable electrical and safety standards.
6. Suitable for luminaire of protection class 1, grounding is mandatory to comply with safety standards
7. The AC light engine needs to be mounted to a heat sink with a thermal interface material between them
8. It is better to use the AC led module with safety cover
9. Modules may be hot to touch. Use caution when handling.



Specialized
LED Strip Manufacturer

Shenzhen
Relight Technology Co.,Ltd

6th Floor, Building A, Guancheng Industrial Park, Gongming Town,
Guangming District, Shenzhen, China

Tel: 86 0755 3369 1713
Web: www.relight-tech.com
E-mail: Sales@relight-tech.com